



TT3000

TraceTek Sensing Cable for Conductive Liquids

TraceTek TT3000 sensing cable detects the presence of conductive liquids at any point along its length. Most acids and bases and even deionized water can be sensed and located. Installed with a TraceTek alarm and locating module, the cable senses the presence of fluid, triggers an alarm, and pinpoints the location.

will detect a wide range of fluids without special design considerations or calibration.

Distributed sensing

TT3000 sensing cable provides distributed leak detection and location over a wide range of areas. The cable is available in a variety of lengths to provide as much coverage as needed.

The cable is designed for a variety of applications, including floor surfaces, subfloors, equipment locations, pipes, storage tanks, and trenches. The cable is small, lightweight, and flexible, allowing easy installation. The smooth design allows quick drying.


Advance technology

Design flexibility

TT3000 sensing cable is available with factory-installed metal connectors that plug together. The measurement circuit is not dependent upon the conductivity of the leaking fluid. Therefore, the same cable

TraceTek's conductive-polymer technology and fluropolymer construction make TT3000 sensing cable mechanically strong and chemically resistant. The cable is constructed of two sensing wires, an alarm signal wire, and a continuity wire embedded in a fluropolymer carrier rod. This rugged construction exposes no metal, and enables the cable to be reusable even in corrosive environments.


Ordering information



TT3000 zone sensing cables with factory-installed connector and end termination

Catalog number
TT3000-Zone-MC


Description
5-ft (1.5 m) sensing cable with preinstalled heat-shrink end termination



TT3000 modular sensing cables with factory-installed connectors

Catalog number
TT3000-0.3M/1FT-MC
TT3000-1M/3FT-MC
TT3000-1.5M/5FT-MC
TT3000-3M/10FT-MC
TT3000-4.5M/15FT-MC
TT3000-7.5M/25FT-MC
TT3000-15M/50FT-MC
TT3000-30M/100FT-MC

Description
1-ft (0.3 m) sensing cable
3-ft (1 m) sensing cable
5-ft (1.5 m) sensing cable
10-ft (3 m) sensing cable
15-ft (4.5 m) sensing cable
25-ft (7.5 m) sensing cable
50-ft (15 m) sensing cable
100-ft (30 m) sensing cable



TT3000 bulk sensing cable (connector kits required) *for installation in double-containment piping*

Catalog number
TT3000-SC


Description
Bulk sensing cable on reel,
Minimum length: 250 ft (75 m)
Maximum length: 1000 ft (300 m)

Connector kits (not shown)
TT3000-CK-MC-M/F

TT3000-CK-MC-M
TT3000-CK-MC-F

Components for five mated pairs of connectors (includes test tools)
One pin-type connector
One socket-type connector

TT3000 Sensing Cable for Conductive Liquids

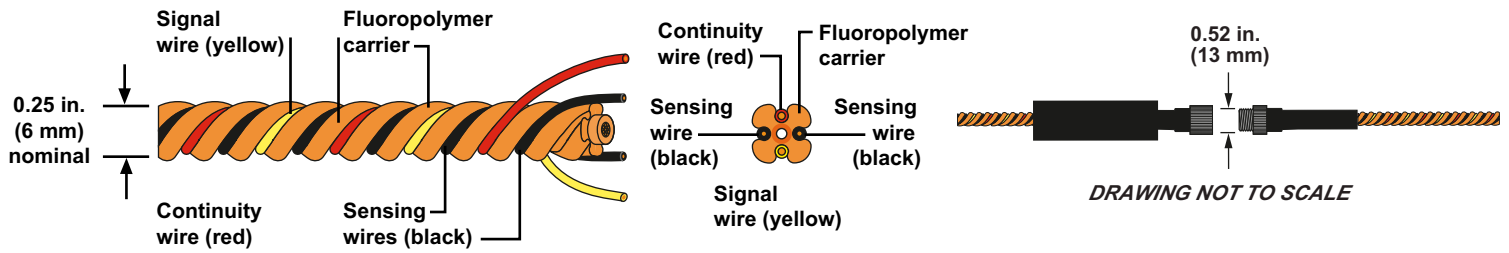

Product characteristics

Cable diameter	0.24 in. (6.0 mm) nominal
Cable diameter with connector	0.52 in. (13 mm) nominal
Continuity and signal wires	2 x 26 AWG with insulation of fluoropolymer
Sensing wires	2 x 30 AWG with jacket of conductive fluoropolymer
Carrier	Fluoropolymer
Cable weight (50-ft length)	2.3 lb

Technical Information

Breaking strength	160 lb
Cut-through force	>50 lb with 0.005 in. blade; crosshead speed 0.2 inch/minute
Abrasion resistance	>65 cycles per UL 719
Maximum continuous operating temperature	Sensing cable: 194° F (90° C) Cable connectors: 185° F (85° C)

Chemical resistance

Cable functions normally after exposure in accordance with ASTM D 543 at 77° F (25° C) for seven days:	Trichloroethylene (100%) Sulphuric acid (98%) Hydrochloric acid (37%) Hexane (100%) Methanol (100%) Sodium hydroxide (10%) Xylene (100%) Aqua regia
Note: Prolonged exposure to concentrated ketones may cause temporary reduction of sensitivity; consult factory.	

Radiation resistance

Cumulative radiation exposure of 10 megarad gamma radiation over design life of 30 years.

Approvals



Sensing cable may be used in Class I, Division 2, Groups A, B, C, D Hazardous Locations. If wiring from module meets requirements for intrinsic safety, sensing cable may be used in Class I, Division 1, Groups A, B, C, D Hazardous Locations (Zone 0 or Zone 1 in Europe).

ISO 9001
The TraceTek products group is a part of Tyco Thermal Products. Chemelex Division is ISO 9001 certified.

REPRESENTED BY:

**Tyco Thermal Controls, LLC
Commercial & Industrial
Infrastructure Division**

**300 Constitution Drive
Menlo Park, CA 94025-1164**

**Industrial Heater
8400 Wolf Lake Dr.
Suite #116
Bartlett, TN 38133
TEL: (888) 451-4328
FAX: (901) 382-4766**

All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their application. Tyco Thermal Controls, LLC makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Thermal Controls, LLC only obligations are those in the Tyco Thermal Controls, LLC Standard Terms and Conditions of Sale for this product, and in no case will Tyco Thermal Controls, LLC be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, Tyco Thermal Controls, LLC reserves the right to make changes-without notification to Buyer-to materials or processing that do not affect compliance with any applicable specification.