

TT1000

TraceTek Water-Sensing Cable

TraceTek TT1000 sensing cables detect the presence of water at any point along their length. Installed with a TraceTek alarm and locating module, the cable senses water intrusion, triggers an alarm, and pinpoints the location.

Distributed sensing

TT1000 sensing cables provide distributed leak detection and location over a wide range of areas. The cable is available in a variety of lengths to provide as much coverage as needed.

Design flexibility

TT1000 sensing cable is supplied with factory-installed plastic connectors that plug together.


The cable is designed for a range of applications, including data center sub-

floors, telecommunication rooms, HVAC equipment locations, pipes, electrical vaults, storage areas, tanks, and roofs. The cable is small, lightweight, and flexible, allowing easy installation. The smooth design allows for quick drying.

Advanced technology

Raychem's conductive polymer technology and fluoropolymer construction make TT1000 sensing cable mechanically strong and resistant to corrosion and abrasion. The cable is constructed of two sensing wires, an alarm signal wire, and a continuity wire embedded in a fluoropolymer carrier rod. The alarm module constantly monitors the sensing cable for continuity. The rugged cable construction exposes no metal, and enables it to be reusable even in corrosive environments.

Ordering information

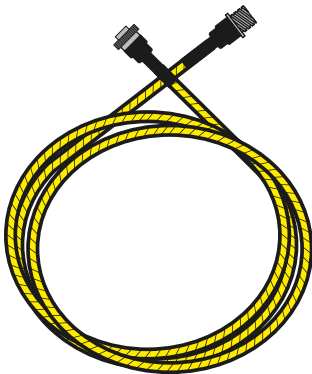

TT1000 modular sensing cable with factory-installed connectors

Catalog Number

TT1000-1M/3FT-PC
TT1000-3M/10FT-PC
TT1000-7M/25FT-PC
TT1000-15M/50FT-PC


Description

3-ft (1 m) sensing cable
10-ft (3 m) sensing cable
25-ft (7 m) sensing cable
50-ft (15 m) sensing cable

Notes:

- Refer to the System Selection Guide for other components of the TraceTek system.
- TT1000 sensing cables are compatible with existing TraceTek TT100 systems.

TT1000 Water-Sensing Cable

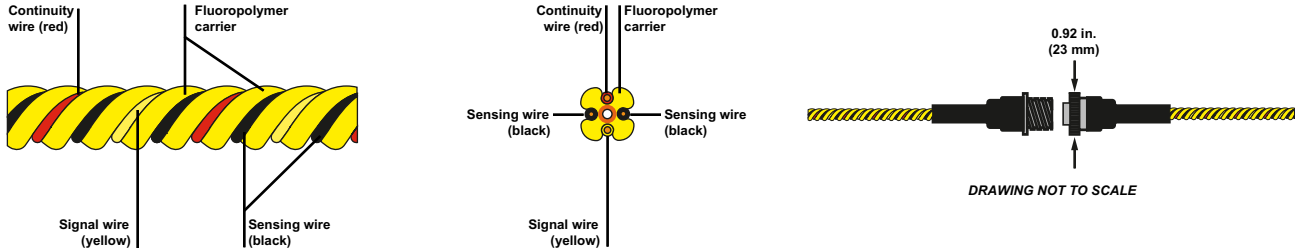

Product characteristics

Cable diameter	0.24 in. (6.0 mm) nominal
Continuity and signal wires	2 x 26 AWG with insulation of fluoropolymer
Sensing wires	2 x 30 A WG with jacket of conductive fluropolymer
Carrier	Fluoropolymer
Cable weight (50-ft length)	2.3 lb
Cable color	High-visibility yellow

Technical Information

Breaking strength	Cable only: 160 lb Including connectors: 70 lb
Cut-through force	>50 lb with 0.005 in. blade Crosshead speed 0.2 inch/minute
Abrasion resistance	>65 cycles per UL 719
Maximum continuous operating temperature	174° F (75° C)
Fire resistance	Class 2 plen um cable per NEC 1996 725-71 (a) UL 910 Modified Steiner Tunnel Test

Performance data

Leak size to alarm (tap water)	2 inches maximum at any point along sensing cable; up to 5000 feet maximum system length.
Drying time	Cable dries and resets within 15 seconds of removal from standing water.
Standard cleaning method	Wipe with clean damp cloth.

Approvals



The TraceTek products group is a part of Tyco Thermal Products. Chemelex Division is ISO 9001 certified.

Tyco Thermal Controls, LLC
Commercial & Industrial
Infrastructure Division

300 Constitution Drive
Menlo Park, CA 94025-1164

REPRESENTED BY:

Industrial Heater
8400 Wolf Lake Dr.
Suite #116
Bartlett, TN 38133
TEL: (888) 451-4328
FAX: (901) 382-4766

All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their application. Tyco Thermal Controls, LLC makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Thermal Controls', LLC only obligations are those in the Tyco Thermal Controls, LLC Standard Terms and Conditions of Sale for this product, and in no case will Tyco Thermal Controls, LLC be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, Tyco Thermal Controls, LLC reserves the right to make changes-without notification to Buyer-to materials or processing that do not affect compliance with any applicable specification.